## **EUROPEAN PATENT OFFICE**

## **Patent Abstracts of Japan**

**PUBLICATION NUMBER** 

2000007062

**PUBLICATION DATE** 

11-01-00

**APPLICATION DATE** 

22-06-98

APPLICATION NUMBER

10174989

APPLICANT: HOKOKU JUSHI KOGYO KK;


INVENTOR: YAMANAKA YASUHIRO;

INT.CL.

: B65D 83/14 B05B 9/04

TITLE

: CONTAINER

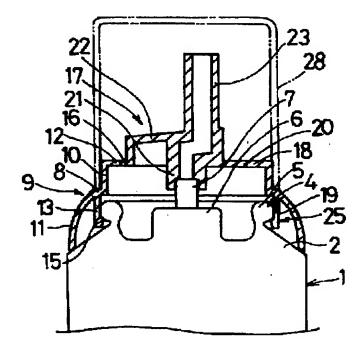

ABSTRACT: PROBLEM TO BE SOLVED: To separate a cover from a container body with a relatively weak force without using a tool such as nippers or a device such as a coin and without providing a special device for separation on the cover.

> SOLUTION: In the container equipped with a cover 9 surrounding a spray stem 7 and a nozzle button 17 for pressing the spray stem 7, the cover 9 and the nozzle button 17 are associated with each other so that the cover 9 is pulled in a direction of removing from a container body 1 by operating the nozzle button 17 in a specific direction. A part of a fitting portion 13 of the cover 9 is equipped with a fitting cancel portion 25 so that fitting of the fitting portion 13 with the container body 1 may be canceled by operating the nozzle button 17 in the specific direction, while a display for operating the nozzle button 17 in a specific direction is provided.

COPYRIGHT: (C)2000,JPO

**BEST AVAILABLE COP**